

# CLOPAY COMMERCIAL – MODEL 3717, 3718 energy series with intellicore®



Model 3717, 16'2" x 14' doors, shown with 24" x 8" Lites

CONSTRUCTION	EFFICIENCY	WARRANTY
1 3/4" THICKNESS	16.2 R-VALUE	10YR LIMITED CONSTRUCTION



## POLYURETHANE INSULATED STEEL DOORS

Clopay Models 3717 and 3718 are for commercial and industrial facilities where temperature control, energy efficiency and durability considerations are all important.

- **Intellicore®** insulation provides the highest energy efficiency, while remaining environmentally friendly.
- **Steel-Sandwich Construction** enhances durability and strength.
- **3-Stage Paint Process** delivers a maintenance-free finish.
- **Thermal Break** enhances insulating properties for extreme energy efficiency.
- **Optional Accessories** add functionality while complementing the building.




Panels are pre-painted inside and out to inhibit rust. Hot-dipped, galvanized steel is painted with primer and given a tough oven-baked polyester top coat to provide the most rust-resistant steel door available. Ten-year warranty against rust-through.

## PANEL DESIGNS



## COLOR OPTIONS

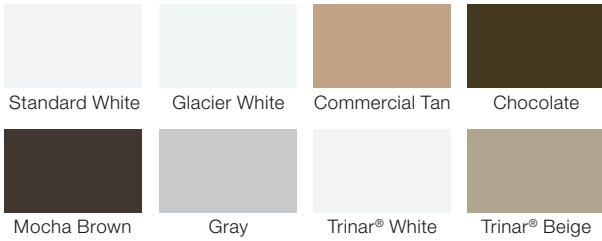

Due to the printing process, colors may vary.

## CUSTOM PAINT OPTION



Color Blast™ offers more than 1,500 Sherwin-Williams® color options to complement your building design. Clopay's durable factory finish has been thoroughly tested and is backed by a five-year warranty.

Due to solar reflective formulation to meet greater than an 38 LRV some colors may not be available.

## FEATURES

### STANDARD HARDWARE

18 gauge single-end stiles; 16 gauge double-end stiles

PVC vinyl astragal with aluminum retainer

Commercial 10-ball steel rollers (nylon tires available)

Steel step plate and lift handle

Heavy-duty galvanized end stiles

Inside slide lock for increased security

19 gauge steel hinge support plates

2" (50.8 mm) or 3" (76.2 mm) track

10,000 cycle springs

Galvanized aircraft cable with minimum 7:1 safety factor

Variety of track configurations to meet building specifications

### MATERIALS AND CONSTRUCTION

Panel Thickness 1-3/4" (44.45 mm)

Insulation CFC and HCFC-free Intellicore® polyurethane

R-value 16.2\*

Thermal Break Continuous foam

Exterior Steel 27 gauge (.016" min.) (.41 mm)

Interior Steel 28 gauge (.015" min.) (.38 mm)

Exterior Surface Stucco embossed, minor ribbed (3717)  
Stucco embossed, flush (3718)

Max Width 3717: 32'2" (9.8 m); 3718: 32'2" (9.8 m)

Max Height 3717: 26' (7.9 m); 3718: 24' (7.3 m)

Exterior Colors Standard White, Glacier White, Commercial Tan, Chocolate, Mocha Brown, Gray, Trinar® White and Trinar® Beige. Also available in Color Blast™.

Interior Color Standard White

Limited 10-Year delamination

Warranties 10-Year rust-through

1-Year material and workmanship

\*Calculated door section R-value is in accordance with DASMA TDS-163.

For special sizes, applications and options, consult Commercial Information Assistance (CIA) at 1-800-526-4301.



For more information on these and other Clopay products, call 1-800-526-4301 or visit [clopaycommercial.com](http://clopaycommercial.com)



©2016 Clopay Building Products Company, Inc., a Griffon company.


## ADDITIONAL OPTIONS

### WINDOW OPTIONS



Available with insulated, insulated tempered or tempered glass. Full vision section, preprinted standard white or chocolate; glazing options include DSB, tempered, plexiglass, insulated, insulated tempered and polycarbonate. 26" x 13" (66.04 cm x 33.02 cm) windows are available with Lexan® or plexiglass.

### HEAVY-DUTY HARDWARE (where not standard)

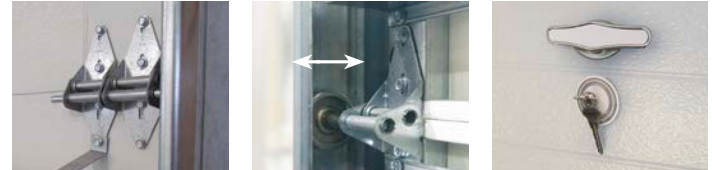


Double-end hinge

3" Track

Outside keyed lock

### HIGH CYCLE SPRINGS



25,000, 50,000 or 100,000 cycle springs available.

### MULLIONS



Carry-away, roll-away or swing-up mullions are available on select sizes.

### BREAK-AWAY SECTION



Single section and double sections available on select sizes.

### PASS DOOR



32" wide x 80" high (.81 m x 2.3 m), max 16'2" (4.9 m) wide section.

### EXHAUST PORT



Can be cut into any type of sectional door. Available in select sizes.



WindCode® doors are available in many sizes and pressure ratings.



Upgrade your standard door with industrial-grade components.

### DISTRIBUTED BY:



CMDC-3717-3718-11\_REV0716